

SEMiX604GAR12E4s



SEMiX® 4s

Trench IGBT Modules

SEMiX604GAR12E4s

Features


- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability
- UL recognized, file no. E63532

Typical Applications*

- AC inverter drives
- UPS
- Electronic Welding

Remarks

- Case temperature limited to $T_C=125^\circ\text{C}$ max.
- Product reliability results are valid for $T_j=150^\circ\text{C}$
- Dynamic values apply to the following combination of resistors:
 $R_{Gon,main} = 1,0 \Omega$
 $R_{Goff,main} = 6,2 \Omega$
 $R_{G,X} = 2,2 \Omega$
 $R_{E,X} = 0,5 \Omega$

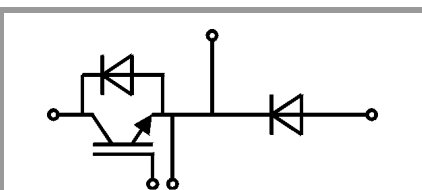

GAR

Absolute Maximum Ratings

| Symbol | Conditions | Values | Unit |
|---------------------------|--------------------------------------------------------------------------------------|---------------------------|------------------|
| IGBT | | | |
| V_{CES} | $T_j = 25^\circ\text{C}$ | 1200 | V |
| I_C | $T_j = 175^\circ\text{C}$ | $T_c = 25^\circ\text{C}$ | 916 |
| | | $T_c = 80^\circ\text{C}$ | 704 |
| I_{Cnom} | | 600 | A |
| I_{CRM} | $I_{CRM} = 3 \times I_{Cnom}$ | 1800 | A |
| V_{GES} | | -20 ... 20 | V |
| t_{psc} | $V_{CC} = 800\text{ V}$ $V_{GE} \leq 20\text{ V}$ $V_{CES} \leq 1200\text{ V}$ | $T_j = 150^\circ\text{C}$ | 10 |
| | | | |
| T_j | | -40 ... 175 | $^\circ\text{C}$ |
| Inverse diode | | | |
| I_F | $T_j = 175^\circ\text{C}$ | $T_c = 25^\circ\text{C}$ | 707 |
| | | $T_c = 80^\circ\text{C}$ | 529 |
| I_{Fnom} | | 600 | A |
| I_{FRM} | $I_{FRM} = 3 \times I_{Fnom}$ | 1800 | A |
| I_{FSM} | $t_p = 10\text{ ms, sin } 180^\circ, T_j = 25^\circ\text{C}$ | 3240 | A |
| T_j | | -40 ... 175 | $^\circ\text{C}$ |
| Freewheeling diode | | | |
| I_F | $T_j = 175^\circ\text{C}$ | $T_c = 25^\circ\text{C}$ | 707 |
| | | $T_c = 80^\circ\text{C}$ | 529 |
| I_{Fnom} | | 600 | A |
| I_{FRM} | $I_{FRM} = 3 \times I_{Fnom}$ | 1800 | A |
| I_{FSM} | $t_p = 10\text{ ms, sin } 180^\circ, T_j = 25^\circ\text{C}$ | 3240 | A |
| T_j | | -40 ... 175 | $^\circ\text{C}$ |
| Module | | | |
| $I_{t(RMS)}$ | $T_{terminal} = 80^\circ\text{C}$ | 600 | A |
| T_{stg} | | -40 ... 125 | $^\circ\text{C}$ |
| V_{isol} | AC sinus 50Hz, $t = 1\text{ min}$ | 4000 | V |

Characteristics

| Symbol | Conditions | min. | typ. | max. | Unit |
|---------------|--------------------------------------------------------------|---------------------------|------|------|------------|
| IGBT | | | | | |
| $V_{CE(sat)}$ | $I_C = 600\text{ A}$ $V_{GE} = 15\text{ V}$ chipelevel | $T_j = 25^\circ\text{C}$ | 1.8 | 2.05 | V |
| | | $T_j = 150^\circ\text{C}$ | 2.2 | 2.4 | V |
| V_{CE0} | chipelevel | $T_j = 25^\circ\text{C}$ | 0.8 | 0.9 | V |
| | | $T_j = 150^\circ\text{C}$ | 0.7 | 0.8 | V |
| r_{CE} | $V_{GE} = 15\text{ V}$ chipelevel | $T_j = 25^\circ\text{C}$ | 1.7 | 1.9 | m Ω |
| | | $T_j = 150^\circ\text{C}$ | 2.5 | 2.7 | m Ω |
| $V_{GE(th)}$ | $V_{GE}=V_{CE}, I_C = 24\text{ mA}$ | 5 | 5.8 | 6.5 | V |
| I_{CES} | $V_{GE} = 0\text{ V}$ $V_{CE} = 1200\text{ V}$ | $T_j = 25^\circ\text{C}$ | | 5 | mA |
| | | $T_j = 150^\circ\text{C}$ | | | mA |
| C_{ies} | $V_{CE} = 25\text{ V}$ | | 37.2 | | nF |
| C_{oes} | $V_{GE} = 0\text{ V}$ | | 2.32 | | nF |
| C_{res} | | | 2.04 | | nF |
| Q_G | $V_{GE} = -8\text{ V...} + 15\text{ V}$ | | 3400 | | nC |
| R_{Gint} | $T_j = 25^\circ\text{C}$ | | 1.25 | | Ω |

SEMiX604GAR12E4s



SEMiX® 4s

Trench IGBT Modules

SEMiX604GAR12E4s

Features


- Homogeneous Si
- Trench = Trenchgate technology
- $V_{CE(sat)}$ with positive temperature coefficient
- High short circuit capability
- UL recognized, file no. E63532

Typical Applications*

- AC inverter drives
- UPS
- Electronic Welding

Remarks

- Case temperature limited to $T_C=125^\circ\text{C}$ max.
- Product reliability results are valid for $T_J=150^\circ\text{C}$
- Dynamic values apply to the following combination of resistors:
 $R_{Gon,main} = 1,0 \Omega$
 $R_{Goff,main} = 6,2 \Omega$
 $R_{G,X} = 2,2 \Omega$
 $R_{E,X} = 0,5 \Omega$

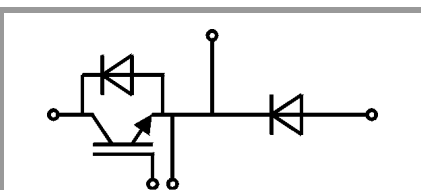

GAR

| Characteristics | | | | | | |
|--------------------|------------------------------------------------------------------|---------------------------|------|----------------|-------|---------------|
| Symbol | Conditions | | min. | typ. | max. | Unit |
| $t_{d(on)}$ | $V_{CC} = 600 \text{ V}$ | $T_J = 150^\circ\text{C}$ | | 374 | | ns |
| t_r | $I_C = 600 \text{ A}$ | $T_J = 150^\circ\text{C}$ | | 85 | | ns |
| E_{on} | $V_{GE} = \pm 15 \text{ V}$ | $T_J = 150^\circ\text{C}$ | | 35 | | mJ |
| $t_{d(off)}$ | $R_{G on} = 1.7 \Omega$ | $T_J = 150^\circ\text{C}$ | | 1277 | | ns |
| t_f | $R_{G off} = 6.9 \Omega$ | $T_J = 150^\circ\text{C}$ | | 114 | | ns |
| E_{off} | $di/dt_{on} = 7100 \text{ A}/\mu\text{s}$ | $T_J = 150^\circ\text{C}$ | | 110 | | mJ |
| | $di/dt_{off} = 6350 \text{ A}/\mu\text{s}$ | $T_J = 150^\circ\text{C}$ | | | | |
| $R_{th(j-c)}$ | per IGBT | | | | 0.049 | K/W |
| Inverse diode | | | | | | |
| $V_F = V_{EC}$ | $I_F = 600 \text{ A}$ | $T_J = 25^\circ\text{C}$ | | 2.1 | 2.46 | V |
| | $V_{GE} = 0 \text{ V}$ | $T_J = 150^\circ\text{C}$ | | 2.1 | 2.4 | V |
| | chiplevel | | | | | |
| V_{F0} | | $T_J = 25^\circ\text{C}$ | 1.1 | 1.3 | 1.5 | V |
| | chiplevel | $T_J = 150^\circ\text{C}$ | 0.7 | 0.9 | 1.1 | V |
| r_F | | $T_J = 25^\circ\text{C}$ | 1.1 | 1.4 | 1.6 | m Ω |
| | chiplevel | $T_J = 150^\circ\text{C}$ | 1.7 | 1.9 | 2.1 | m Ω |
| I_{RRM} | $I_F = 600 \text{ A}$ | $T_J = 150^\circ\text{C}$ | | 430 | | A |
| Q_{rr} | $di/dt_{off} = 6000 \text{ A}/\mu\text{s}$ | $T_J = 150^\circ\text{C}$ | | 100 | | μC |
| E_{rr} | $V_{GE} = -15 \text{ V}$ | $T_J = 150^\circ\text{C}$ | | 44 | | mJ |
| | $V_{CC} = 600 \text{ V}$ | $T_J = 150^\circ\text{C}$ | | | | |
| $R_{th(j-c)}$ | per diode | | | | 0.086 | K/W |
| Freewheeling diode | | | | | | |
| $V_F = V_{EC}$ | $I_F = 600 \text{ A}$ | $T_J = 25^\circ\text{C}$ | | 2.1 | 2.46 | V |
| | $V_{GE} = 0 \text{ V}$ | $T_J = 150^\circ\text{C}$ | | 2.1 | 2.4 | V |
| | chiplevel | | | | | |
| V_{F0} | | $T_J = 25^\circ\text{C}$ | 1.1 | 1.3 | 1.5 | V |
| | chiplevel | $T_J = 150^\circ\text{C}$ | 0.7 | 0.9 | 1.1 | V |
| r_F | | $T_J = 25^\circ\text{C}$ | 1.1 | 1.4 | 1.6 | m Ω |
| | chiplevel | $T_J = 150^\circ\text{C}$ | 1.7 | 1.9 | 2.1 | m Ω |
| I_{RRM} | $I_F = 600 \text{ A}$ | $T_J = 150^\circ\text{C}$ | | 430 | | A |
| Q_{rr} | $di/dt_{off} = 6000 \text{ A}/\mu\text{s}$ | $T_J = 150^\circ\text{C}$ | | 100 | | μC |
| E_{rr} | $V_{GE} = -15 \text{ V}$ | $T_J = 150^\circ\text{C}$ | | 44 | | mJ |
| | $V_{CC} = 600 \text{ V}$ | $T_J = 150^\circ\text{C}$ | | | | |
| $R_{th(j-c)}$ | per diode | | | | 0.086 | K/W |
| Module | | | | | | |
| L_{CE} | | | | 22 | | nH |
| R_{CC+EE} | res., terminal-chip | $T_C = 25^\circ\text{C}$ | | 0.7 | | m Ω |
| | | $T_C = 125^\circ\text{C}$ | | 1 | | m Ω |
| $R_{th(c-s)}$ | per module | | | 0.03 | | K/W |
| M_s | to heat sink (M5) | | 3 | | 5 | Nm |
| M_t | | to terminals (M6) | 2.5 | | 5 | Nm |
| | | | | | | Nm |
| w | | | | | 400 | g |
| Temperature Sensor | | | | | | |
| R_{100} | $T_C=100^\circ\text{C}$ ($R_{25}=5 \text{ k}\Omega$) | | | $493 \pm 5\%$ | | Ω |
| $B_{100/125}$ | $R(T)=R_{100}\exp[B_{100/125}(1/T-1/T_{100})]$; $T[\text{K}]$; | | | $3550 \pm 2\%$ | | K |

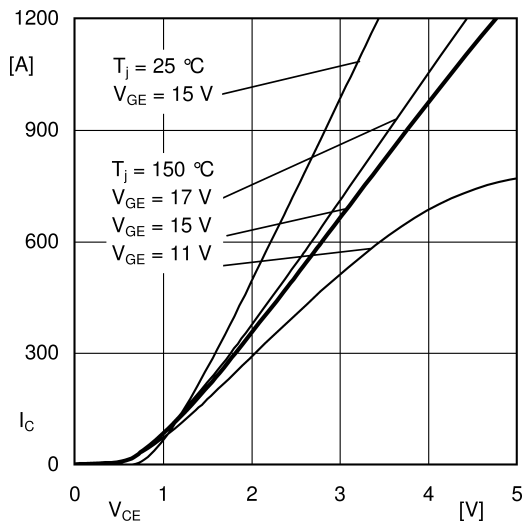


Fig. 1: Typ. output characteristic, inclusive $R_{CC'+EE'}$

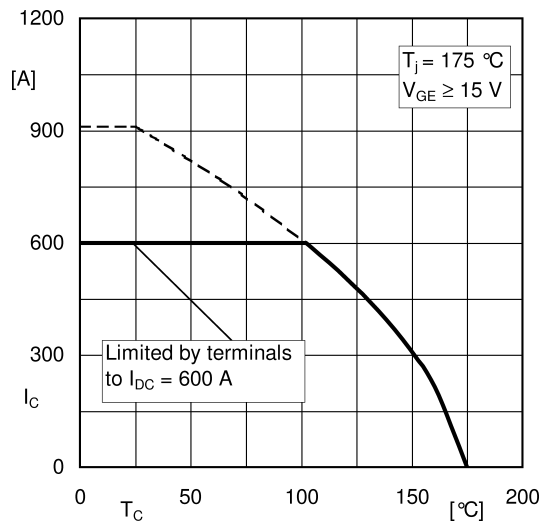


Fig. 2: Rated current vs. temperature $I_C = f(T_C)$

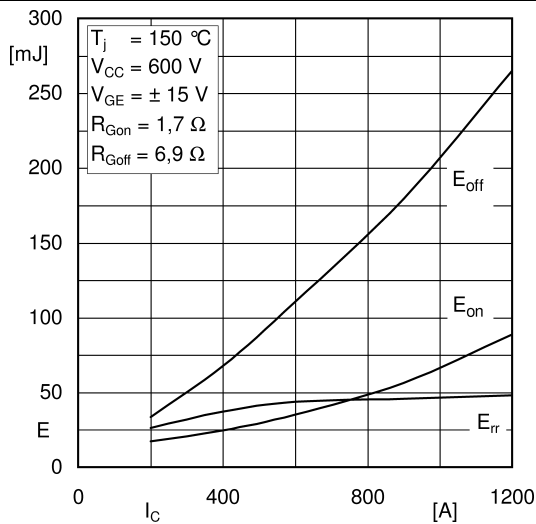


Fig. 3: Typ. turn-on /-off energy = $f(I_C)$

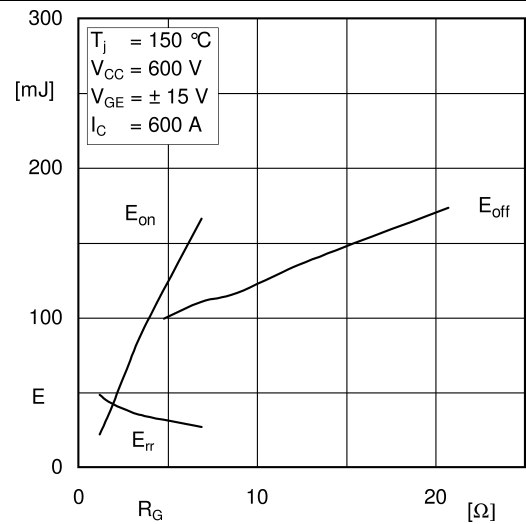


Fig. 4: Typ. turn-on /-off energy = $f(R_G)$

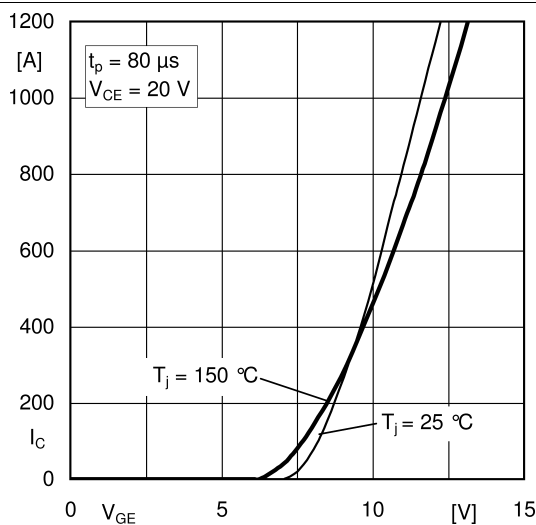


Fig. 5: Typ. transfer characteristic

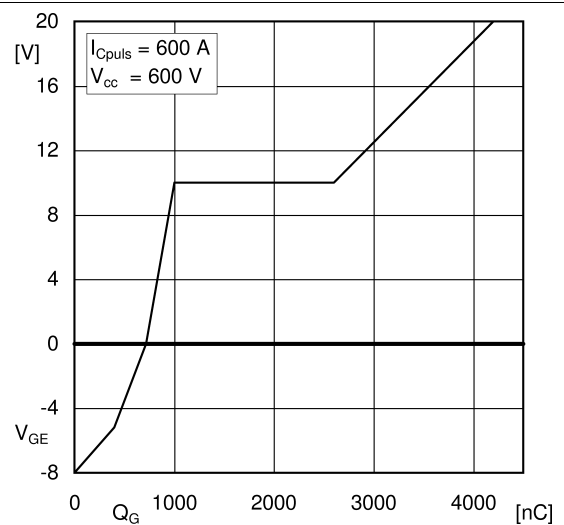


Fig. 6: Typ. gate charge characteristic

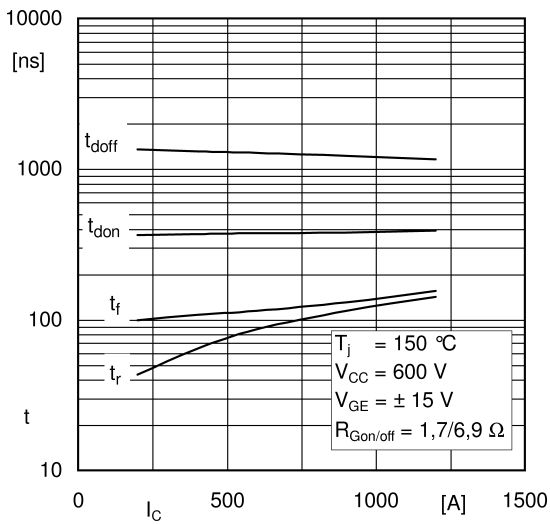


Fig. 7: Typ. switching times vs. I_C

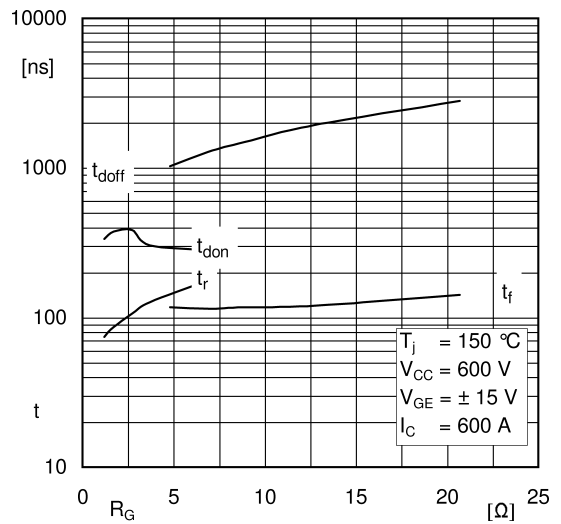


Fig. 8: Typ. switching times vs. gate resistor R_G

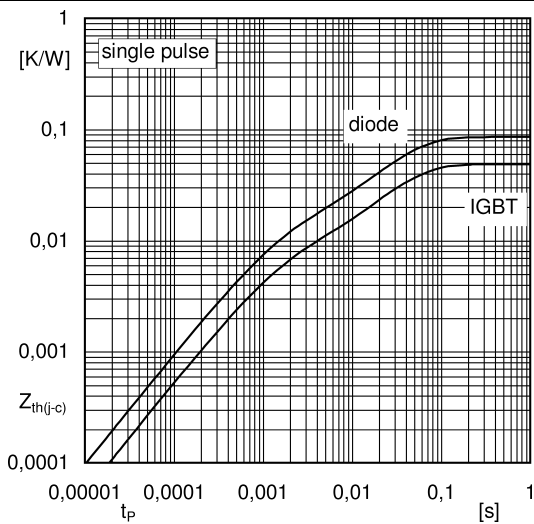


Fig. 9: Typ. transient thermal impedance

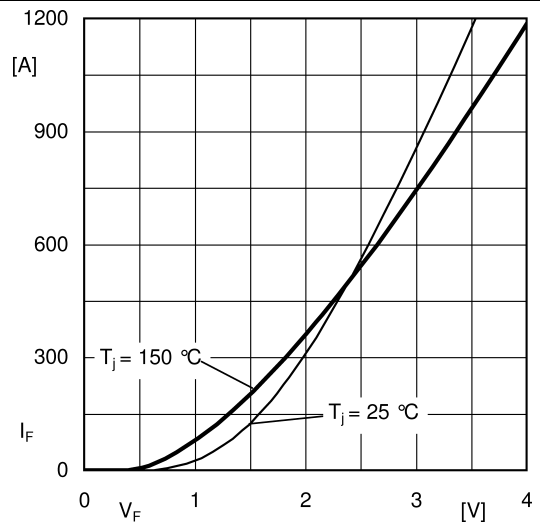


Fig. 10: Typ. CAL diode forward charact., incl. R_{CC+EE}

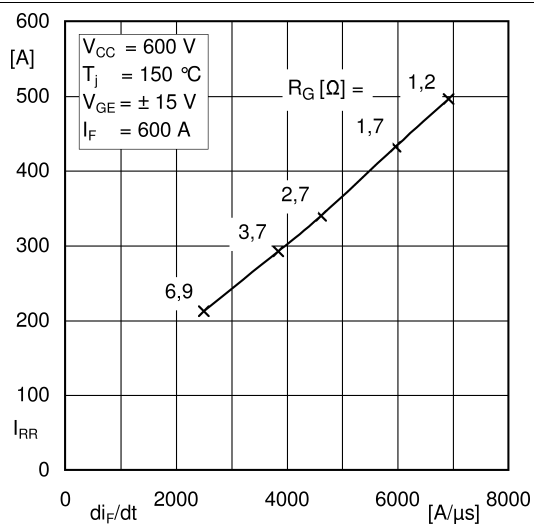


Fig. 11: Typ. CAL diode peak reverse recovery current


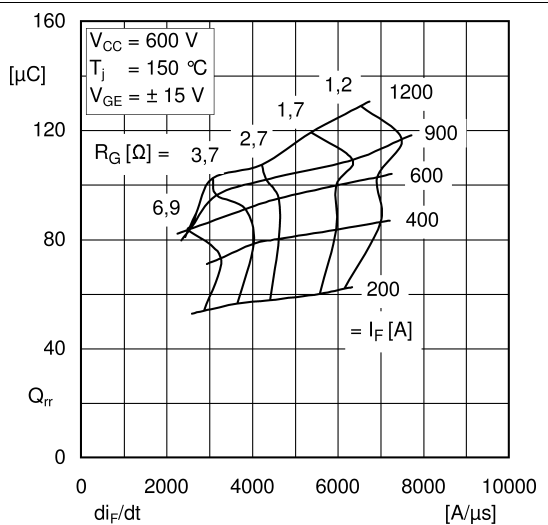


Fig. 12: Typ. CAL diode recovery charge


SEMiX604GAR12E4s

Case: SEMiX 4s

general tolerance:
ISO 2768-mK
ISO 8015

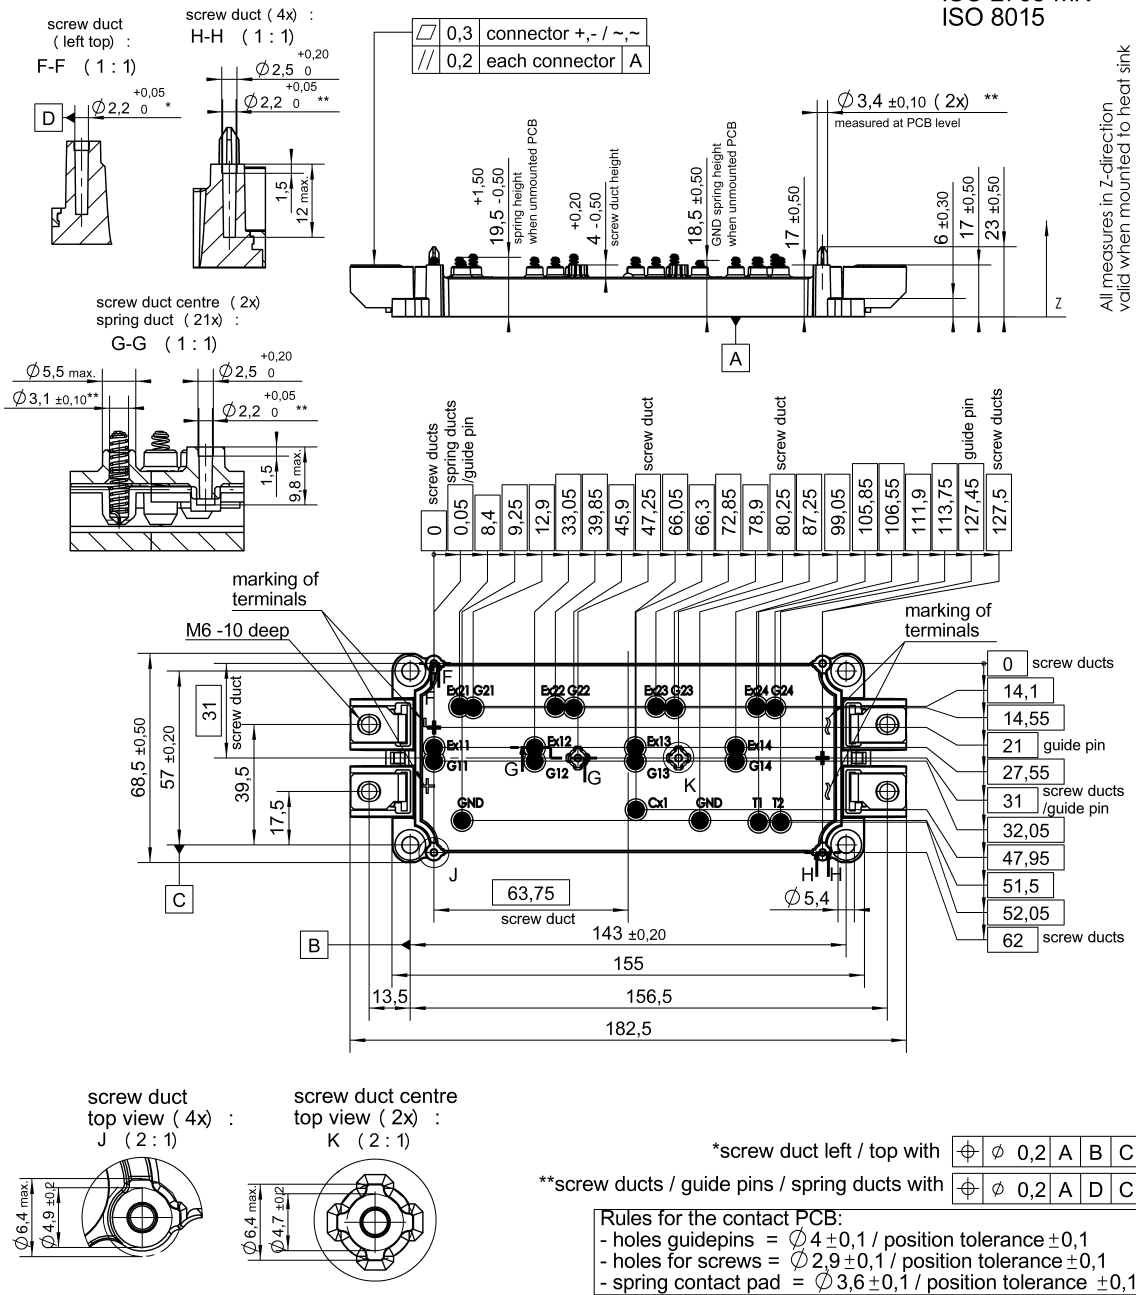

SEMiX 4s

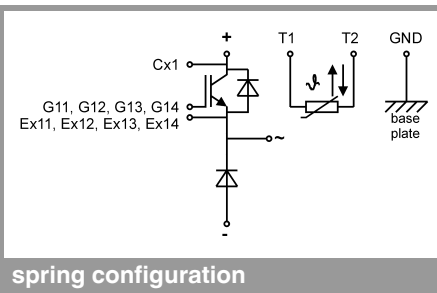

This is an electrostatic discharge sensitive device (ESDS), international standard IEC 60747-1, Chapter IX

* The specifications of our components may not be considered as an assurance of component characteristics. Components have to be tested for the respective application. Adjustments may be necessary. The use of SEMIKRON products in life support appliances and systems is subject to prior specification and written approval by SEMIKRON. We therefore strongly recommend prior consultation of our staff.